



МАРТ

Е-МАРТ
ВАШ ПОСТАВЩИК
ZKTECO

<https://emart.su/brands/zkteco/>

Федеральный	8 800 511-77-41
Санкт-петербург	8 812 426-99-66
Москва	8 495 137-99-67
Краснодар	8 861 205-62-66

www.emart.su

mail@emart.su

FR1500

Flush-Mounted RS-485 Fingerprint Reader



Features

- Single gang Standard junction box installation.
- Flush-Mounted Design for neat installation.
- RS-485 Communication Interface.
- SilkID Fingerprint Sensor and Support Live Finger Detecting.
- Stainless Steel Front casing.
- Optional Fingerprint Protective Cover.

Specifications

Additional Info

Working Temperature: 0 °C ~ 45 °C
 Working Humidity: 20 ~ 80%
 Dimensions(LxWxH): 121.3 × 77.3 × 38 mm
 Algorithm: ZKFinger v10.0

Power Supply

Operating Voltage 12V DC
 Stand-by Mode Power Consumption:12V*60mA=0.72W
 Peak Current of Fingerprint scanning:140mA

Hardware

1.0 GHz CPU
 ZKSilkID Sensor
 Buzzer Prompt
 Three-color Indicator Light

Compatibility

inBio/inBioPro Controllers
 Standalone Fingerprint Devices

Standard Features

125KHz RFID Card


Optional Features

125KHz HID Prox Card
 13.56MHz MifareCard(S50 / S70)
 13.56MHz HID Iclass Card
 13.56MHz Felica Card

Communication

RS485

Configuration

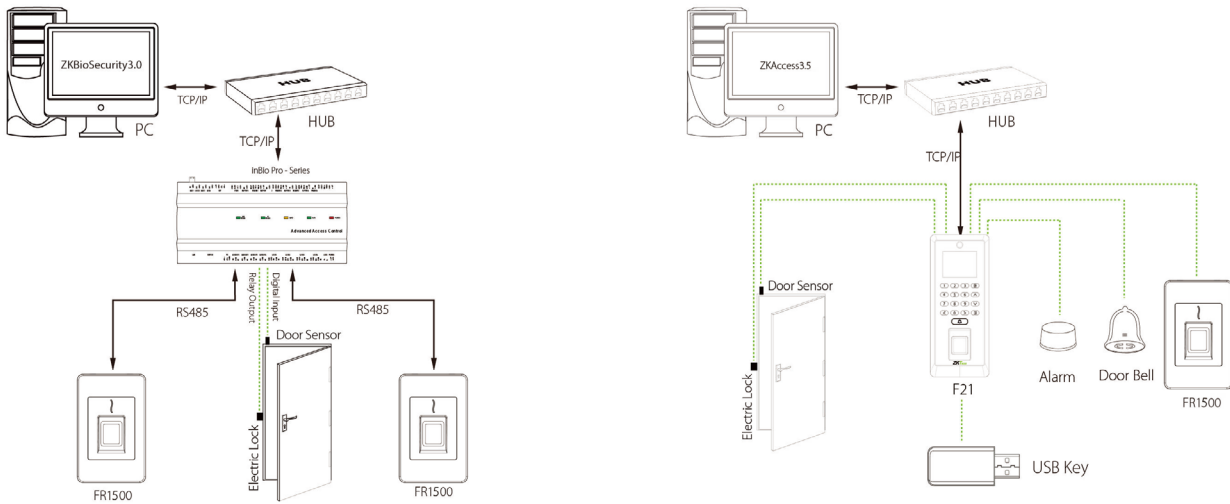

Dimensions (mm)

